
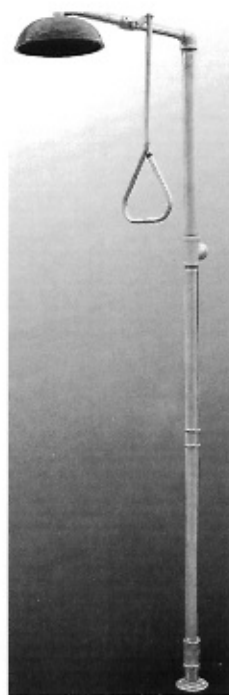


FREE STANDING DRENCH SHOWER

#4117

This shower unit is operated by pulling down on a pull rod which opens a continuous flow ball valve. The shower head will continue to discharge water until the valve is manually closed. This is done by pushing upward onto the pull rod. Heavy wall schedule 80, hot dip galvanized piping. Heavy duty green ABS plastic shower head.

- Pedestal base - 4" Dia. floor flange
- Valve assembly - 1/2" (eye/face wash) & 1" (drench shower) NPTF plated brass stay-open ball valve.
- Water supply - 1 1/4" NPTF
- Waste or outlet - 1 1/4" NPTF
- Flow rate at 30 PSI - 30 GPM
- Compliance - ANSI Z358.1-1998
- Includes inspection tag

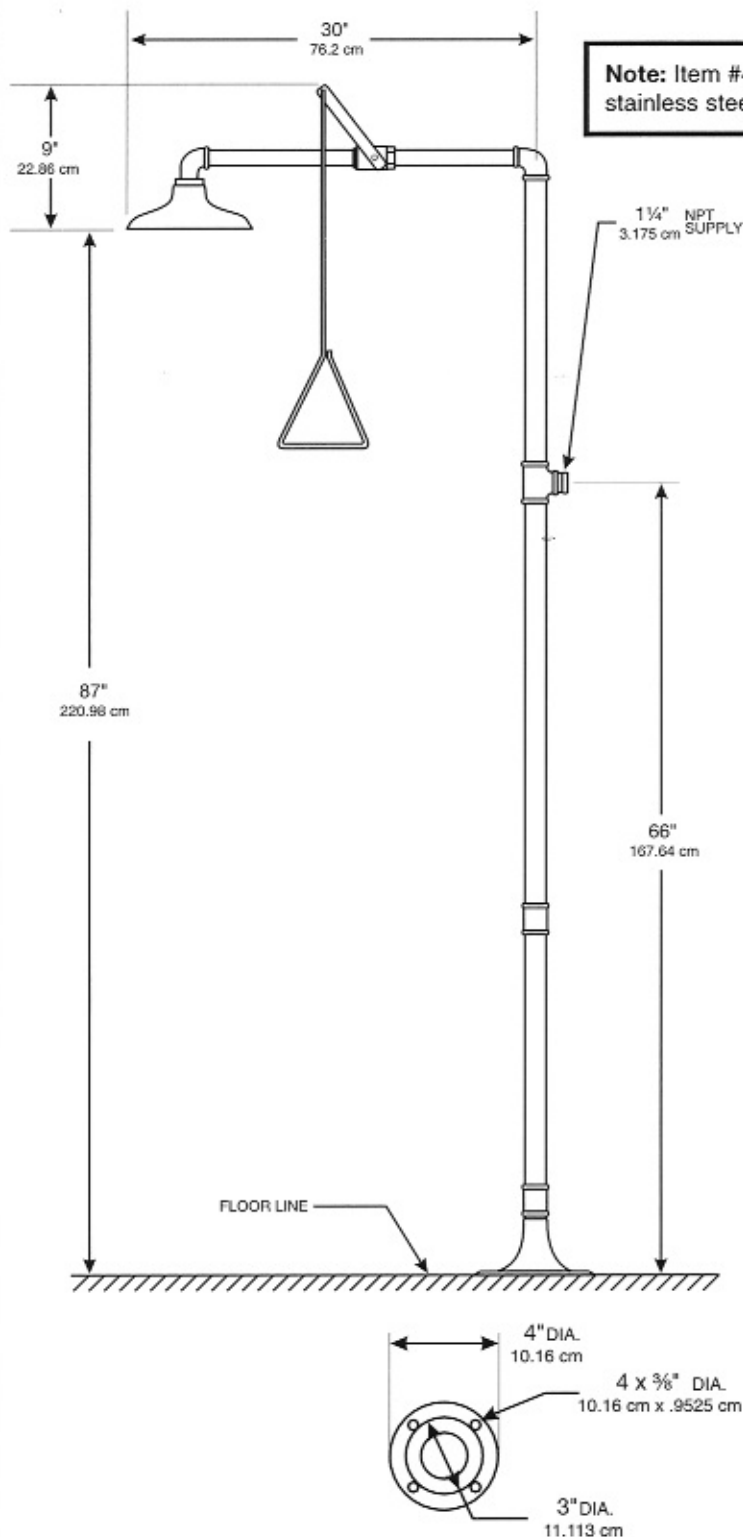

Notice: All models shown meet ANSI Standard and OSHA rules and regulations relating to this type of product. Units should be tested regularly. Continued product improvements make specifications subject to change without notice.